# Shut off Valve - Cartridge, Model: KHSLB


Ref. No: H03320, Release March 2018 (Dimensions in mm)



#### **Description**


Shut off valve Cartridge model **KHSLB25-2.0** are seat type. Balanced sealed poppet construction to reduce operating forces.

#### **Unit Dimensions**





### **Cavity Details**



# **Technical Specifications**

Mounting position · · · · · · · · · · · · · · · · · Optional.

Flow direction . . . . . . . . . . . . . . . . From port `A' to port `B'.

Operating pressure · · · · · · · · · · · · · · · · 350 bar.

Hydraulic medium · · · · · · · · · · · · · Mineral oil.

Fluid temperature range · · · · · · · · · -20 °C to +70 °C.

Fluid cleanliness requirement  $\cdots \cdots$  As per ISO 19/16 or better.

Maximum flow handling capacity · · · · · · · Refer graph.

# Shut off Valve - Cartridge, Model: KHSLB


Ref. No: H03320, Release March 2018 (Dimensions in mm)



## **Performance Curves**

Oil used : ISO VG 68, Viscosity : 68 cSt @ 40 °C

Test conducted at : 50 °C.

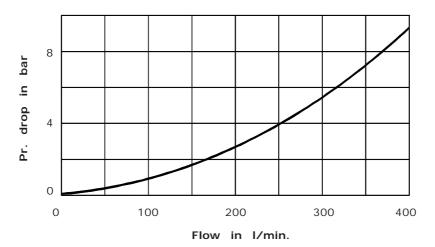

### **Ordering Code**

