


Straight Male Stud Couplings

GE-G

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434
Male BSPP (G) thread

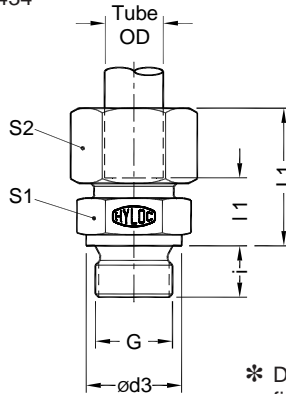

* Dimensions given are approx figures with tightened nut.

Part No.	Series	Tube od	G Male BSP thread	ød3	i	l1	* L1	S1	S2
GE06PLG	Light L 250 bar	6	G 1/8 A	14	8	8.5	24	14	14
GE08PLG		8	G 1/4 A	18	12	10	25	19	17
GE08PLG03		8	G 3/8 A	22	12	11.5	26.5	22	17
GE10PLG		10	G 1/4 A	18	12	11	26.5	19	19
GE10PLG03		10	G 3/8 A	22	12	12.5	28	22	19
GE12PLG02		12	G 1/4 A	18	12	12	27	19	22
GE12PLG		12	G 3/8 A	22	12	12.5	27.5	22	22
GE12PLG04		12	G 1/2 A	26	14	13	28	27	22
GE15PLG		15	G 1/2 A	26	14	14	30	27	27
GE18PLG	160 bar	18	G 1/2 A	26	14	14.5	31.5	27	32
GE22PLG		22	G 3/4 A	32	16	16.5	33.5	32	36
GE28PLG	100 bar	28	G 1 A	39	18	17.5	35.5	41	41
GE35PLG		35	G1 1/4 A	49	20	17.5	40.5	50	50
GE42PLG		42	G1 1/2 A	55	22	19	42.5	55	60
GE06PSG	Heavy S 630 bar	6	G 1/4 A	18	12	13	28.5	19	17
GE08PSG		8	G 1/4 A	18	12	15	30	19	19
GE10PSG		10	G 3/8 A	22	12	15	32	22	22
GE12PSG		12	G 3/8 A	22	12	17	33.5	22	24
GE12PSG04		12	G 1/2 A	26	14	17.5	34	27	24
GE16PSG	400 bar	16	G 1/2 A	26	14	18.5	37.5	27	30
GE20PSG		20	G 3/4 A	32	16	20.5	43	32	36
GE25PSG		25	G 1 A	39	18	23	48	41	46
GE30PSG	250 bar	30	G1 1/4 A	49	20	23.5	51.5	50	50
GE38PSG		38	G1 1/2 A	55	22	26	57.5	55	60